



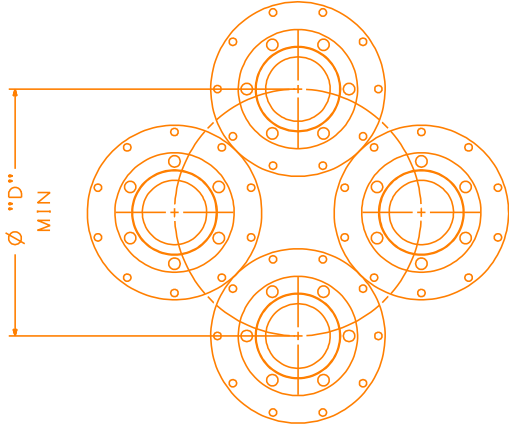

NO. OF SPINDLES	D MIN.
2	130.00
3	151.00
4	184.00
5	222.00
6	260.00

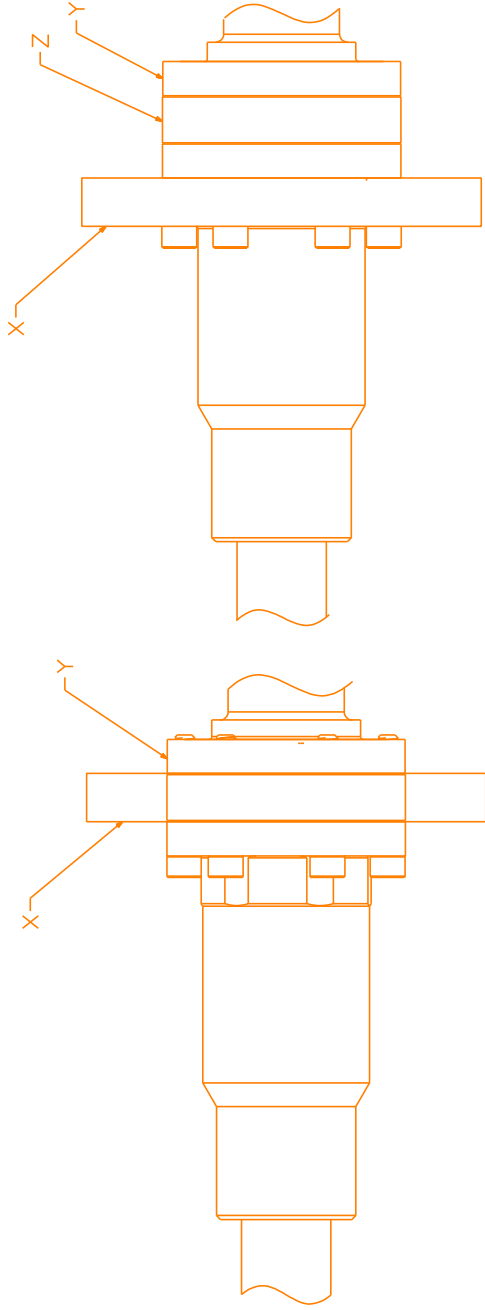

MOUNTING OPTIONS

- 1) WHEN FIXTURE IS BETWEEN SPINDLE AND TRANSDUCER (Y) , REMOVE AND DISCARD SPACER PLATE (Z) .
NOTE: FIXTURE PLATE (X) MUST MAINTAIN THICKNESS OF SPACER PLATE (Z) .
- 2) WHEN FIXTURE PLATE (X) IS IN FRONT OF SPINDLE FLANGE, SPACER PLATE (Z) THICKNESS MAY BE IGNORED:
NOTE: M8 MOUNTING SCREWS MUST BE LENGTHENED BY FIXTURE PLATE (X) THICKNESS.
SUPPLIED MOUNTING SCREWS: M8 X 1.25 X 45.