


Updating Firmware on an IQi Controller and IQi Series Tools

Controller Update (USB)


1. Go to our SendSafely File Repository and download the latest release file to your PC.
 - a. Link:
<https://filesafe.ingersollrand.com/receive/?packageCode=R0xH0I3CZTge7FOI2JUtkroDyiqJLwxfULry0BLVYno#keycode=AFFzeIR6NhkhOTThScIWRyjOe9J-2x9fbcDhTjLCgkk>
2. Copy the file to a formatted USB drive.
3. Insert the USB drive into one of the USB Ports on the controller.
4. Turn on the controller.
5. Log in.
6. Click on the Hamburger icon.
7. Go to System Maintenance->Firmware Upgrade.
8. From the Drop Down Menu select ControlBox.
9. The Firmware Field will automatically update with the new firmware file.
10. Click on Update.
11. After progress shows 100% the controller will reboot.
12. Log in.
13. Click the Hamburger icon.
14. Click About.
15. Confirm the new firmware version.
16. Remove USB drive.

Controller Update (Web Browser)


1. Go to our SendSafely File Repository and download the latest release file to your PC.
 - a. Link:
<https://filesafe.ingersollrand.com/receive/?packageCode=R0xH0I3CZTge7FOI2JUtkroDyiqJLwxfULry0BLVYno#keycode=AFFzeIR6NhkhOTThScIWRyjOe9J-2x9fbcDhTjLCgkk>
2. Turn on the controller.
3. Log in.
4. Click on the Hamburger icon.
5. Go to System Maintenance->Firmware Upgrade.
6. From the Drop Down Menu select ControlBox.
7. Click on Choose File.

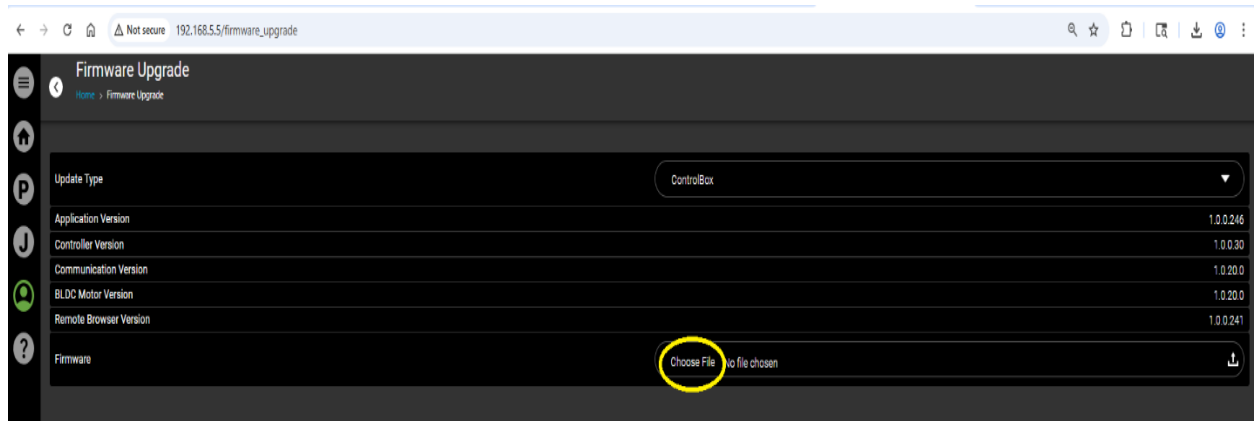


8. Browse to the file location, select the file, and select Open.

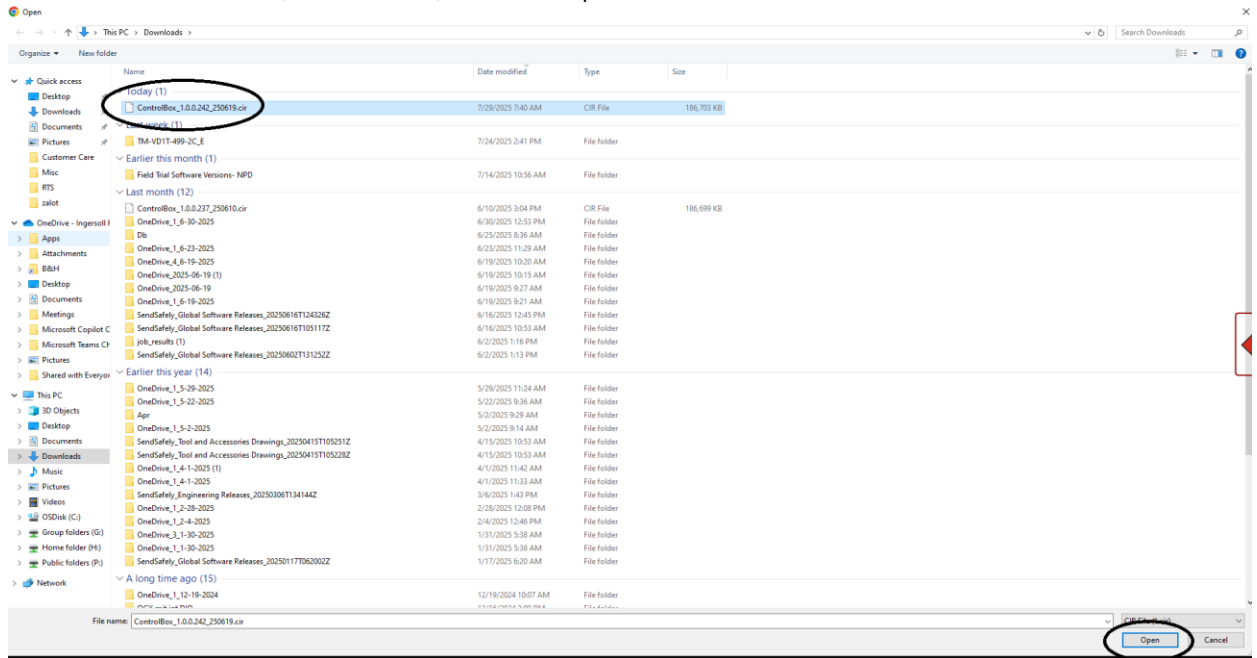

9. Click on the Update button.

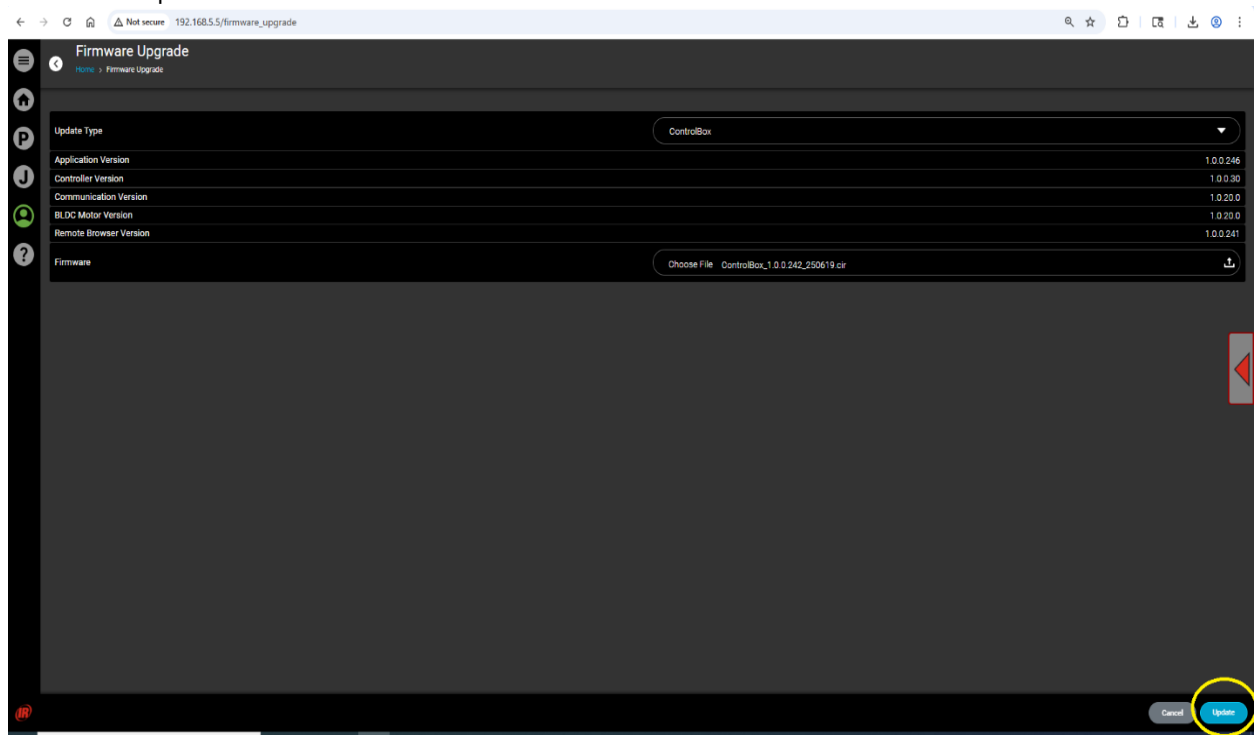

10. You will see the Progress Bar.

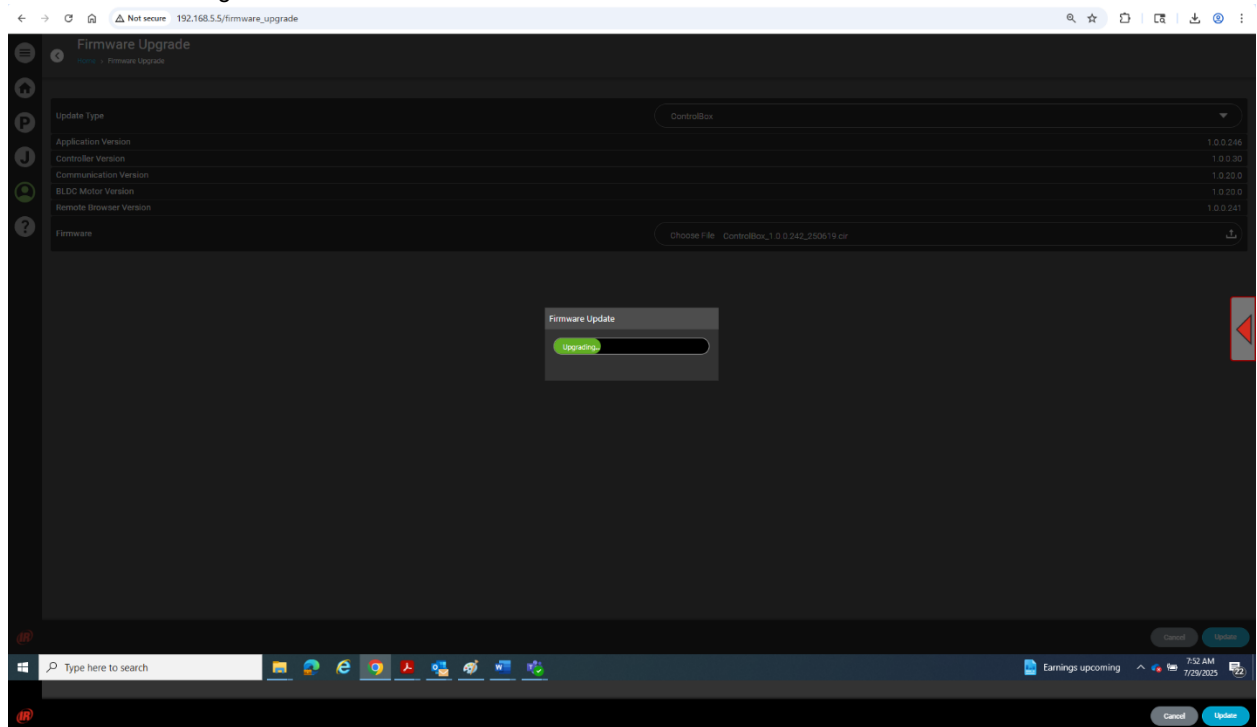


11. After the Progress Bar shows Complete the controller will reboot.

12. Log in.

13. Click the Hamburger icon.

14. Click About.

15. Confirm the new firmware version.

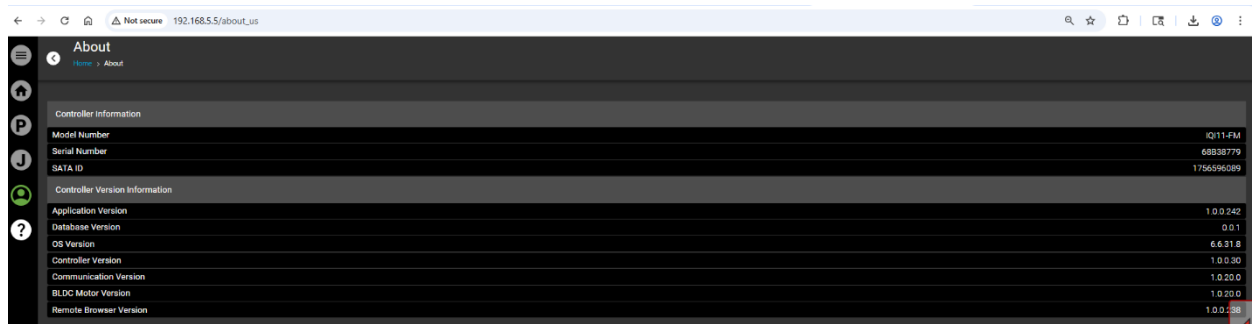


Tool Update (USB)

1. Go to our SendSafely File Repository and download the latest release file to your PC.
 - a. Link:
<https://filesafe.ingersollrand.com/receive/?packageCode=R0xH0I3CZTqe7FOI2JUtkroDyiqJLwxfULry0BLVYno#keycode=AFFzeIR6NhkhOTThScIWRyjOe9J-2x9fbcDhTjLCgkk>
2. Copy the file to a formatted USB drive.
3. Insert the USB drive into one of the USB Ports on the controller.
4. Turn on the controller.
5. Log in.
6. Click on the Hamburger icon.
7. Go to System Maintenance->Firmware Upgrade.
8. From the Drop Down Menu select Tool.


9. The Firmware Field will automatically update with the new firmware file.
10. Click on Update.
11. After progress shows 100% the controller will return to the Home screen.
12. Click on the Hamburger icon.
13. Click About.
14. Confirm the new firmware version.
15. Remove USB drive.

Tool Update (Web Browser)


1. Go to our SendSafely File Repository and download the latest release file to your PC.
 - a. Link: <https://filesafe.ingersollrand.com/receive/?packageCode=R0xH0I3CZTge7FOI2JUtkroDyiqJLwxflULry0BLVYno#keycode=AFFzeIR6NhkhOTThScIWRyjOe9J-2x9fbcDhTjLCgkk>
2. Turn on the controller.
3. Log in.
4. Click on the Hamburger icon.
5. Go to System Maintenance->Firmware Upgrade.
6. From the Drop Down Menu select ControlBox.
7. Click on Choose File.

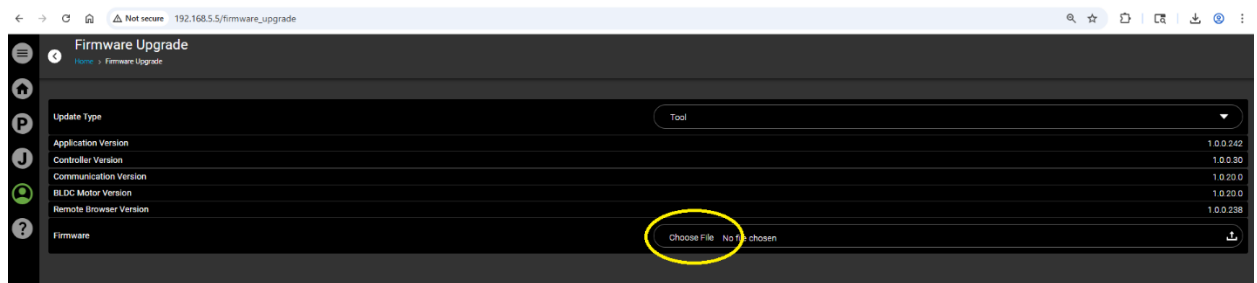


8. Browse to the file location, select the file, and select Open.

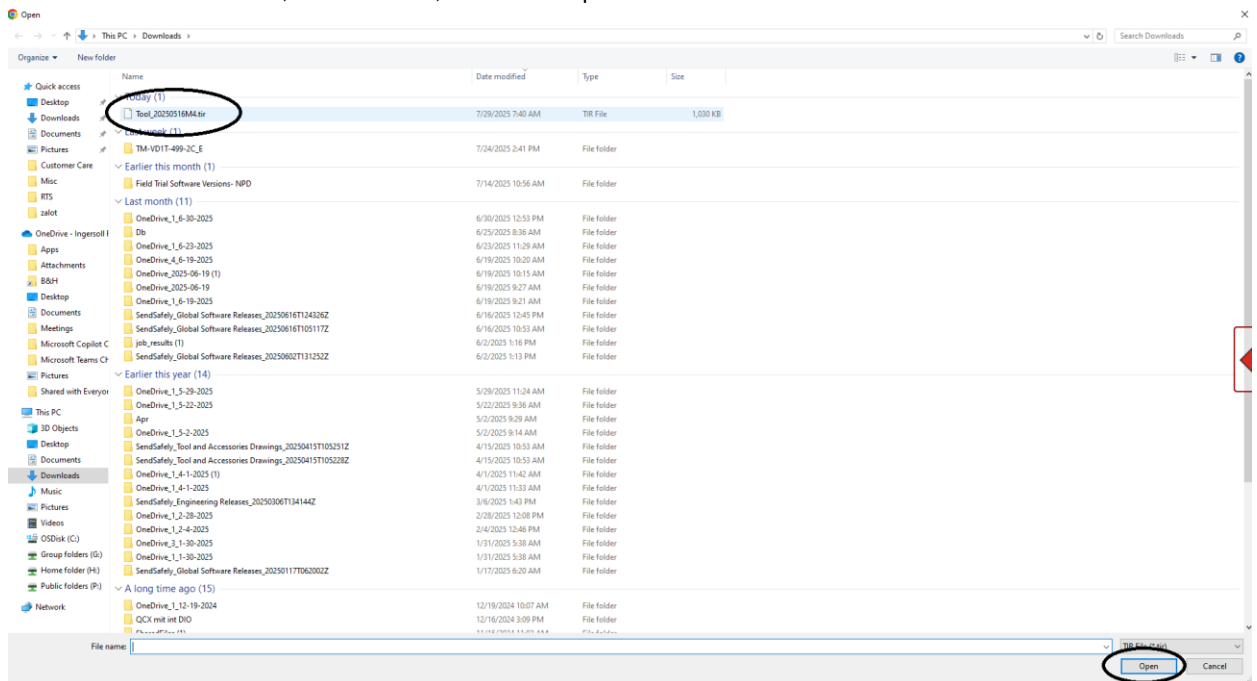

9. Click on the Update button.

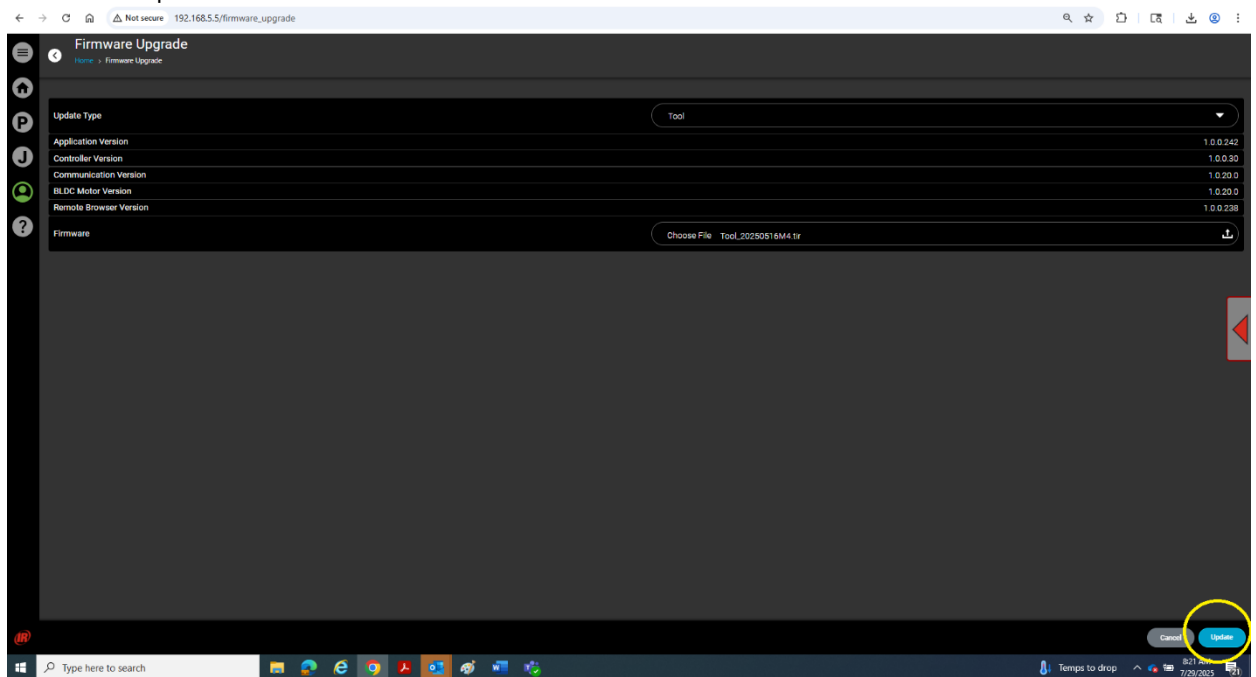

10. You will see the Progress Bar.

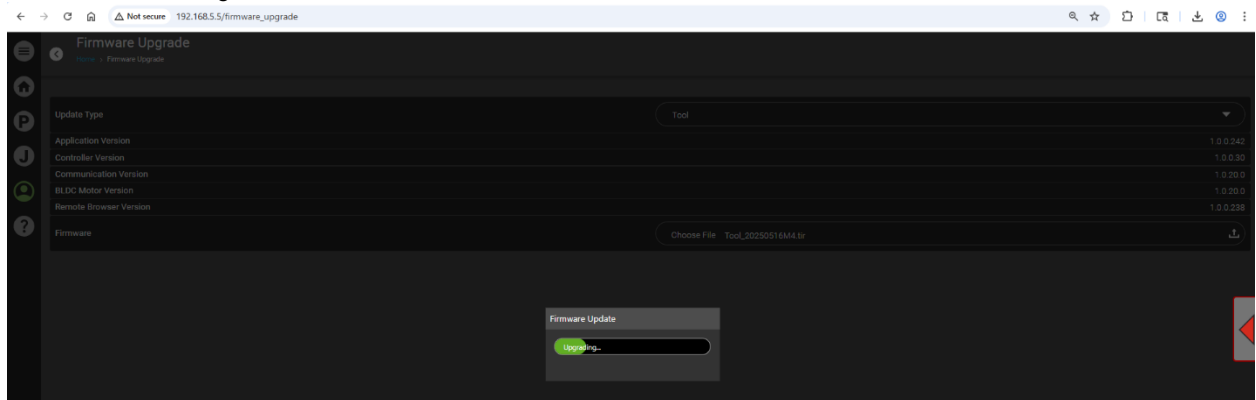

11. After the Progress Bar shows Complete, the system will return to the Home screen.
12. Select the Hamburger icon.
13. Click About
14. Confirm the new firmware version.

